




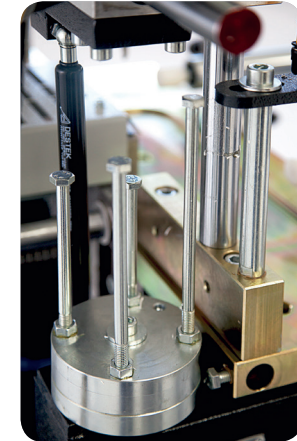

- Manual control with the guideness of tracking tip.
- Copy routing with 1:1 ratio template.



- Practical height adjustment with support stoppers.



General Features

- Espagnolette canal, lock, cylinder and handle holes opening and triple drilling on PVC profiles.
- Copy router motor runs with a button easily.
- Practical setting with mechanical support plates.
- Canal opening without template thanks to support plates.

Optional Equipments



- MR 100 Centering Device



- MD 100 Multiple Support Plate Centering Unit



H: 1720 mm
W: 810-2510 mm
L: 910 mm



400 V
L1-L2-L3-N-PE
50 / 60 Hz
1.1 kW




157 kg




6-8 Bar
15 l / min




ØD: 11 mm x2
ØD: 13 mm



ØD1: 5,2 mm
ØD1: 8 mm
ØD2: 8 mm
18.000 rpm
ØD2



A: 105 mm
B: 95 mm
C: 260 mm



a: max: 120 mm
h: max: 100 mm
min: 5 mm

